

EZL EASY Lacer



Nipple feeder with electronic control of screwing for balanced and easy lacing of any kind of wheel





SPECIFICATIONS

Range:	12" to 28" wheels
Production capacity :	20 to 30 W/hour depending on operator ability
Working air pressure:	6 bars minimum
Air consumption :	30 liters/min
Electrical connection :	220V
Power consumption :	150 VA
Sound level :	<70 dB
Weight:	65 Kg
Size:	Size: 1,4 x 0,9 x 1,6 m
Safety mark :	CE

MAIN FEATURES

- Advanced nipple feeder for efficient wheel lacing
- Wheel library for settings recall
- Suitable for a wide range of rim sizes and diameters, simple and double wall up to 45mm depth

BUT ALSO

- Rim fixture can be used for tire fitting
- Easy to move (on rollers)

OPTION

Add-on for tire fitting

With more than 50 years of experience, **Mach1 Machinery** has given way to **BikeBotix** to offer you an even more comprehensive offer.



WHEEL BUILDING



RIM MANUFACTURING




BIKE ASSEMBLY



DATA MANAGEMENT



BIKE TOOLS

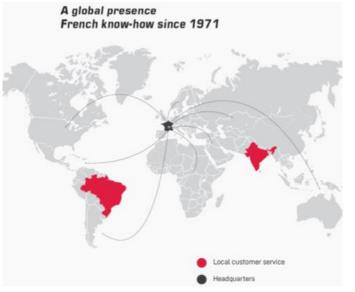

Alongside expert and highly qualified development and customer service team 5 areas of expertise.

Proud to be a major player and a reference partner, BikeBotix exports worldwide solutions based on 4 fundamentals:

INNOVATION, PERFORMANCE, RELIABILITY and FLEXIBILITY.

